


# AquaSoft Pro and AquaSoft Pro Plus Specifications

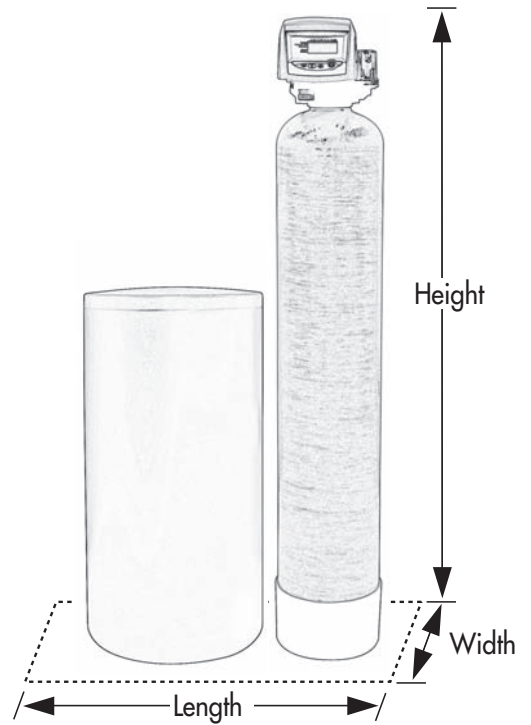


## AquaSoft Pro

MODEL		PES16M255	PES32M255	PES48M255	PES25M255CAB
<sup>1</sup> Capacity: (Grains/Lbs. NaCl)	Maximum	14,800 @ 7.5	29,600 @ 15.0	44,400 @ 22.6	22,200 @ 11.3
	Medium	12,400 @ 5.0	24,700 @ 10.0	37,100 @ 15.0	18,500 @ 7.5
	Minimum	9,600 @ 2.5	19,300 @ 5.0	29,900 @ 7.6	14,500 @ 3.8
Amount of Media (Cu. Ft.)		.50	1.0	1.5	.75
<sup>2</sup> Maximum Iron (PPM)		3.0	3.0	3.0	3.0
Maximum Drain Flow Rate (GPM)		1.2	2.5	3.5	1.6
Continuous Flow Rate (GPM @ P-PSI)		7.0 @ 13.2	7.0 @ 14.3	9.6 @ 14.5	8.0 @ 14.5
Water Pressure Range (PSI)		25-100	25-100	25-100	25-100
Water Temp. (°F)		33-100	33-100	33-100	33-100
Electrical Requirements (volts-hertz)		110-50/60	110-50/60	110-50/60	110-50/60
Pipe Size		1"	1"	1"	1"
Total Dimensions:	Media Tank	7"W x 35"H	9"W x 48"H	10"W x 54"H	12"W x 20"D x 44"H
	Brine Tank	18"W x 33"H	18"W x 33"H	18"W x 33"H	

## AquaSoft Pro Plus

MODEL		PES32M268	PES48M268
<sup>1</sup> Capacity: (Grains/Lbs. NaCl)	Maximum	33,000 @ 15.0	53,700 @ 22.5
	Medium	28,700 @ 9.0	46,700 @ 13.5
	Minimum	14,100 @ 3.3	23,000 @ 5.0
Amount of Media (Cu. Ft.)		1.0	1.5
<sup>2</sup> Maximum Iron (PPM)		3.0	3.0
Maximum Drain Flow Rate (GPM)		5.8	5.8
Continuous Flow Rate (GPM @ P-PSI)		10.2 @ 10.7	12.8 @ 15.0
Water Pressure Range (PSI)		25-100	25-100
Water Temp. (°F)		33-100	33-100
Electrical Requirements (volts-hertz)		110-50/60	110-50/60
Pipe Size		1"	1"
Total Dimensions:	Media Tank	9"W x 48"H	10"W x 54"H
	Brine Tank	18"W x 33"H	18"W x 33"H

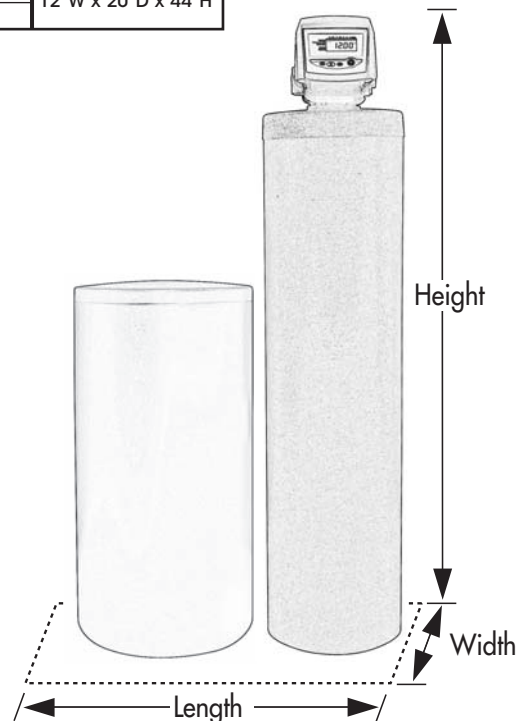

<sup>1</sup> All AquaSoft Pro and Pro Plus water conditioners are pre-factory set at medium salting.

<sup>2</sup> Combined iron and manganese removal varies depending on the form of iron, manganese, pH and other local conditions. These units will not eliminate or treat an iron bacteria problem.