


AquaSoft CL™ Specifications

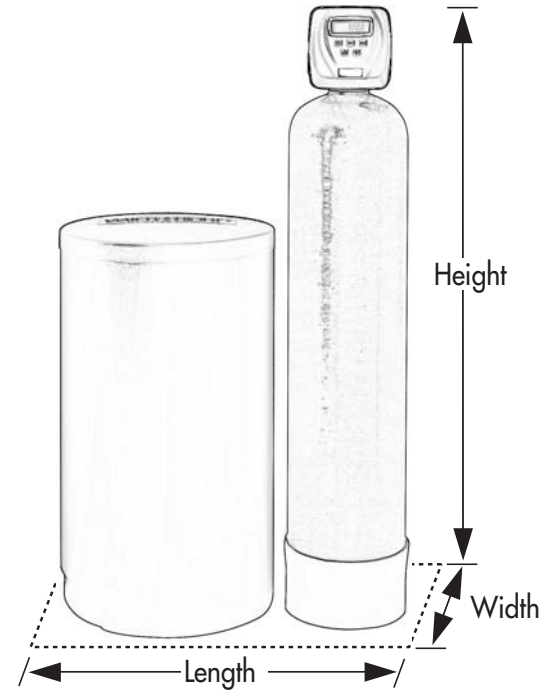

AquaSoft CL

MODEL		PES32CC-1044CL	PES48CC-1054CL	PES72CC-1354CL
¹Capacity: (Grains/Lbs. NaCl)	Maximum	32,000 @ 15.0	48,800 @ 21.0	72,800 @ 24.0
	Medium	28,400 @ 9.0	44,400 @ 15.0	64,200 @ 18.0
	Minimum	23,600 @ 6.0	35,400 @ 9.0	53,000 @ 12.0
Amount of Media (Cu. Ft.)		1.0	1.5	2.5
Maximum Water Hardness (GPG)		75	100	100
²Maximum Iron (PPM)		1.0	1.0	1.0
Minimum pH Required		7	7	7
Peak Flow Rate (GPM @ P-PSI)		17.1 @ 15.0	14.3 @ 15.0	18.5 @ 15.0
Continuous Flow Rate (GPM @ P-PSI)		5.0 @ 2.8	5.0 @ 3.8	5.0 @ 2.4
Water Pressure Range (PSI)		25-100	25-100	25-100
Water Temp. (°F)		33-100	33-100	33-100
Electrical Requirements (volts-hertz)		110-50/60	110-50/60	110-50/60
Pipe Size		1"	1"	1"
Total Dimensions:	Media Tank	10"W x 52"H	10"W x 62"H	13"W x 62"H
	Brine Tank	18"W x 33"H	18"W x 33"H	18"W x 40"H

MODEL	PES32CC-1044CL		PES48CC-1054CL		PES72CC-1354CL	
	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.
Brine Refill	5:51	3	9:53	5	11:53	6
Backwash	8	22	8	22	10	32
Brine & Rinse	60	24	90	36	90	47
Rapid Rinse	4	11	4	11	4	13
Total	78	60	112	74	116	98