



FEATURES AND BENEFITS

Ease of Installation. TW-Series tanks offer a lightweight design for easy installation. They can be installed without special water filling procedures and can be pumped dry during pump-outs. They are also resistant to flotation in high water conditions.


Superior Strength. A triple-wall provides a thick, composite wall structure that acts like a structural I-beam. Factory installed bulkheads offer superior structural stability under heavy loads. Reinforced, welded access ports do not distort upon backfilling or during pump-outs

Flexibility. These tanks are suitable for use as septic and pump tanks, come in single and dual compartments, and have flat bottoms allowing for easy storage.


Innovative Technology. TW-Series septic tanks are the only plastic tank on the market manufactured with a proprietary state-of-the-art rotomolding process making these tough tanks comparable to concrete.

PRODUCT SIZES AND ACCESSORIES


The TW-Series Septic Tanks by Infiltrator come in six different sizes: TW-300, TW-500, TW-900, TW-1050, TW-1250, and TW-1500 gallon. Tanks may be used as septic or pump tanks and come in single or dual compartments (except TW-300 and TW-500). Infiltrator's TW-Risers are compatible with any TW-Series Septic Tank.




TW-300
PROFILE VIEW



TW-500
PROFILE VIEW

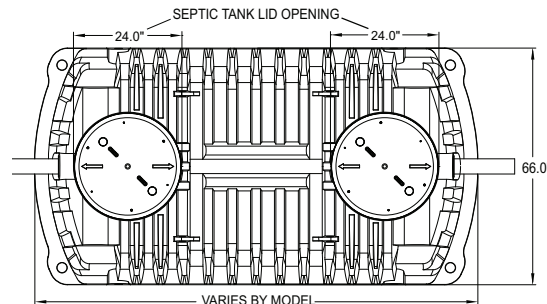


TW-900, TW-1050, TW-1250, AND TW-1500
PLAN VIEW

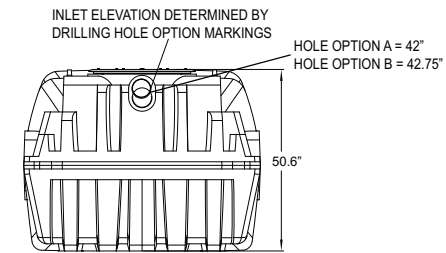

**TW-900, TW-1050,
TW-1250, AND TW-1500**
INLET END VIEW

For more information, call Infiltrator Systems at 800.221.4436 or visit www.infiltratorsystems.com

TANK AND LID CROSS SECTION VIEWS

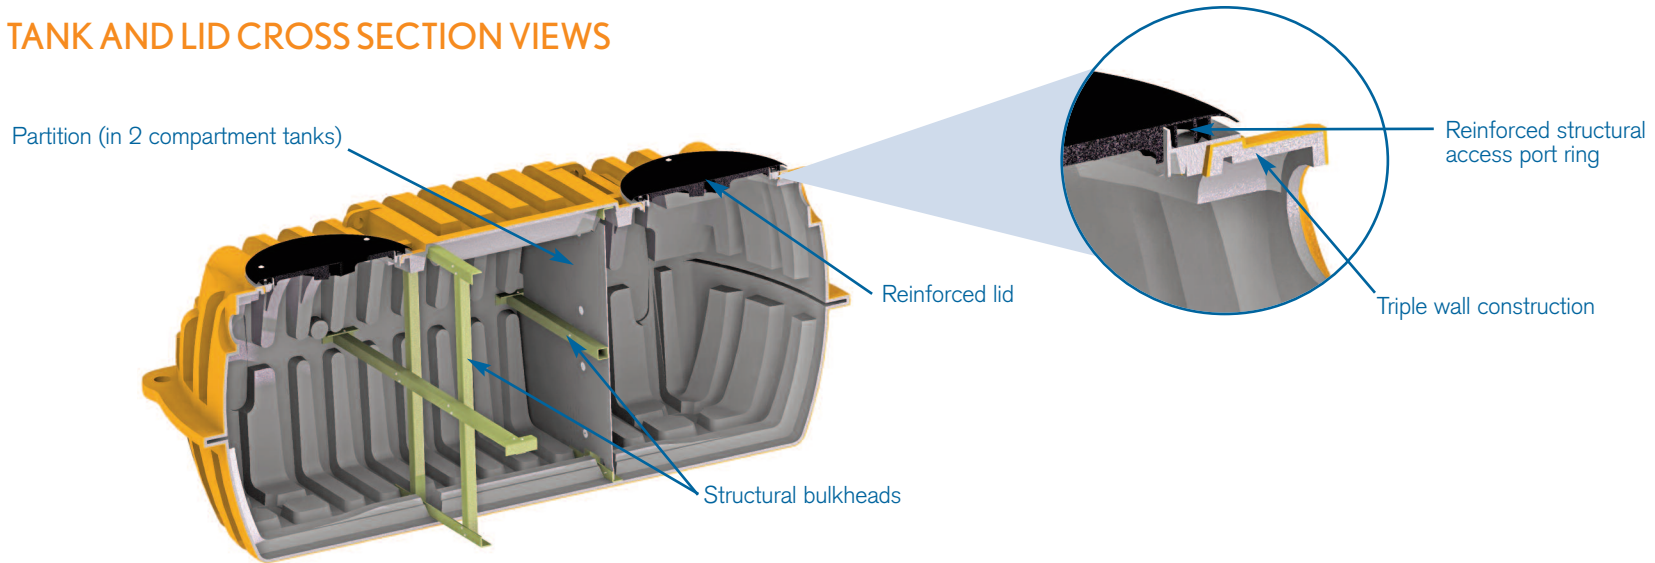

TW-SERIES PUMP TANK NOMINAL SPECIFICATIONS

Tank Model	Total Volume	Diameter	Height
TW-300	313 gal. [1,185 L]	50 in. [1,270 mm]	50 in. [1,270 mm]
TW-500	504 gal. [1,908 L]	62.5 in. [1,588 mm]	51 in. [1,295 mm]



TW-SERIES SEPTIC TANK NOMINAL SPECIFICATIONS

Tank Model	Total Volume	Length	Width	Height
TW-900	1,055 gal. [3,994 L]	110.4 in. [2,804 mm]	66.0 in. [1,676 mm]	50.6 in. [1,285 mm]
TW-1050	1,212 gal. [4,588 L]	123.7 in. [3,142 mm]	66.0 in. [1,676 mm]	50.6 in. [1,285 mm]
TW-1250	1,448 gal. [5,481 L]	143.7 in. [3,650 mm]	66.0 in. [1,676 mm]	50.6 in. [1,285 mm]
TW-1500	1,762 gal. [6,669 L]	170.4 in. [4,328 mm]	66.0 in. [1,676 mm]	50.6 in. [1,285 mm]

